

wiper®

CATALOGUE

CONTENTS

Linear showerdrains	4–21
PREMIUM PREMIUM ZK – NEW PREMIUM SLIM INVISIBLE INVISIBLE SLIM ELITE ELITE SLIM CLASSIC EYE-DRAIN	
Custom versions	22–27
PREMIUM ZKL / ZKPL / ZKP S-LINE LINEAR DRAINS IN ANY LENGTH AND WITH OFFSET DRAIN TRAPS	
Point drains	28–35
WP PREMIUM WP CLASSIC WP INVISIBLE – NEW WIPER TOP	
Shower trays	36–37
SOLID EYE – NEW	
Subfloor slabs	38–41
SHOWERLAY SHOWERLAY ONEWAY – NEW	
Water-proofing systems	42–45
SYSTEM ISOL-ONE TANKIGN KIT FOR SHOWER CABIN	
Mats	46–49
SUNFLOOR – ELECTRIC UNDERFLOOR HEATING – NEW WIPER SOUND STOP – SOUNDPROOF MAT – NEW	
Drain traps	50–51
Hygiene Certification	52
Configuration selection table	53

PREMIUM

The PREMIUM linear shower drains are a series of WIPER linear drains complete with a sealing flange that helps with installation of the product in a floor system which features a water-proofing layer. An optional membrane can be used to greatly facilitate installation. The finished installation provides a smartly refined grate and frame of stainless steel, 84 mm wide and as long as ordered, which means virtually any length desired. The product is available in many versions to suit the needs of diverse projects.

wiper®



PREMIUM



○ Discharge pipe dia. \varnothing 40 or \varnothing 50 if installed with the included reducer (adapter) piece

• Standard lengths L [mm]:
500, 600, 700, 800, 900, 1000, 1100, 1200

• Water flow rate acc. EN 1253 Q [l/min]:
36 - siphon SNAKE
48 - siphon DROP 35 and DROP 50



For this product you can buy:

- SEALING MEMBRANE
- ADJUSTABLE LEGS PCL-1
- TANKING KIT s. 44


NEW




Option with siphons also available

DROP 35 and DROP 50


More info on page 50-53

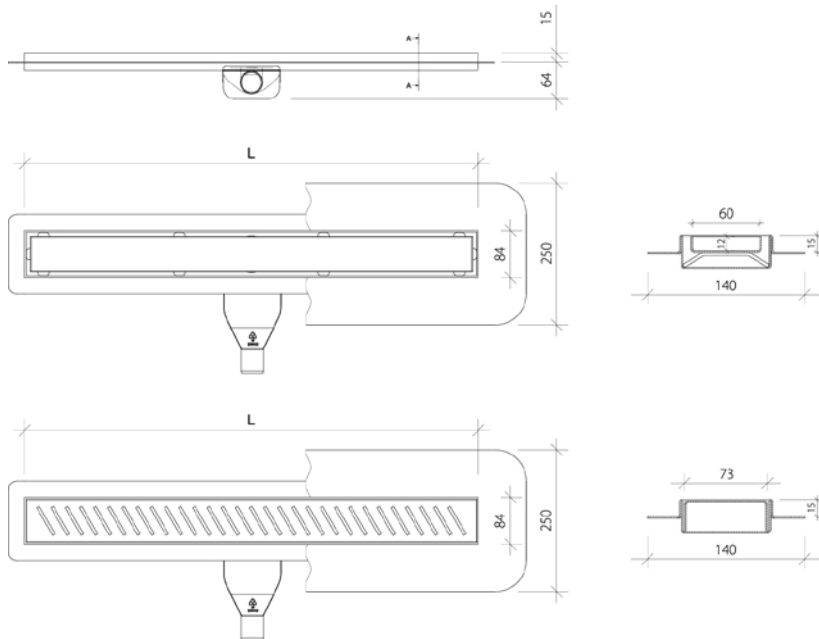

flange

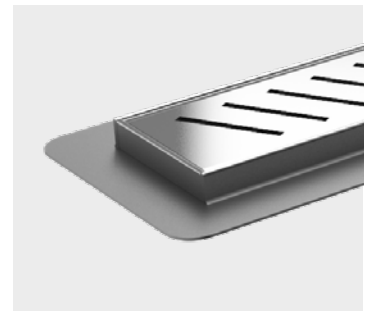

surface finish

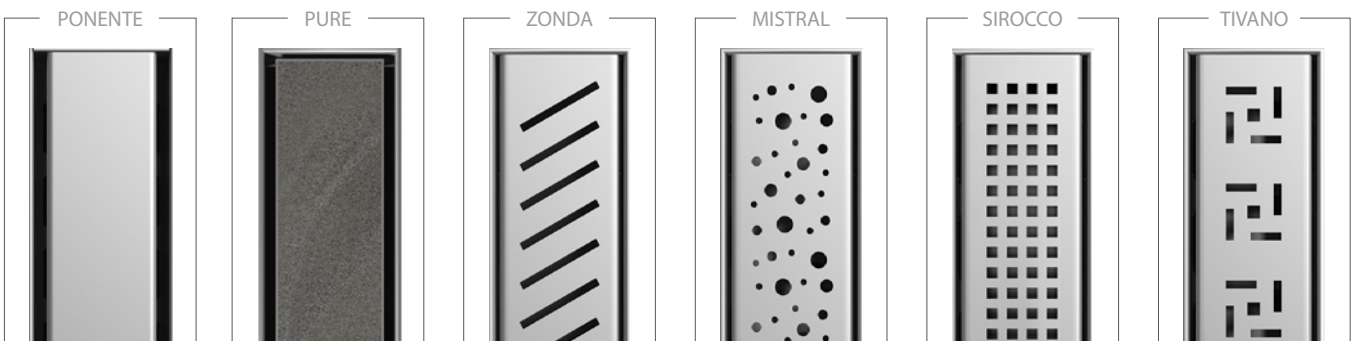

PREMIUM ZK

NEW

The PREMIUM ZK linear shower drains are a series of WIPER linear drains complete with a sealing flange that helps with installation of the product in a floor system which features a water-proofing layer. The flange is bent vertically (and with many options available) which facilitates installation at the floor-to-wall corners with an optimum offset between the grate and the wall tiles. The finished installation provides a smartly refined grate and frame of stainless steel, 84 mm wide and as long as ordered, which means virtually any length desired. The product is available in many versions to suit the needs of diverse projects.



wiper®

PREMIUM ZK



○ Discharge pipe dia. \varnothing 40 or \varnothing 50 if installed with the included reducer (adapter) piece

• Standard lengths L [mm]:
500, 600, 700, 800, 900, 1000, 1100, 1200

• Water flow rate acc. EN 1253 Q [l/min]:
36 - siphon SNAKE
48 - siphon DROP 35 and DROP 50



For this product you can buy:

- SEALING MEMBRANE
- ADJUSTABLE LEGS PCL-1
- TANKING KIT s. 44


NEW




Option with siphons also available

DROP 35 and DROP 50

More info on page 50–53

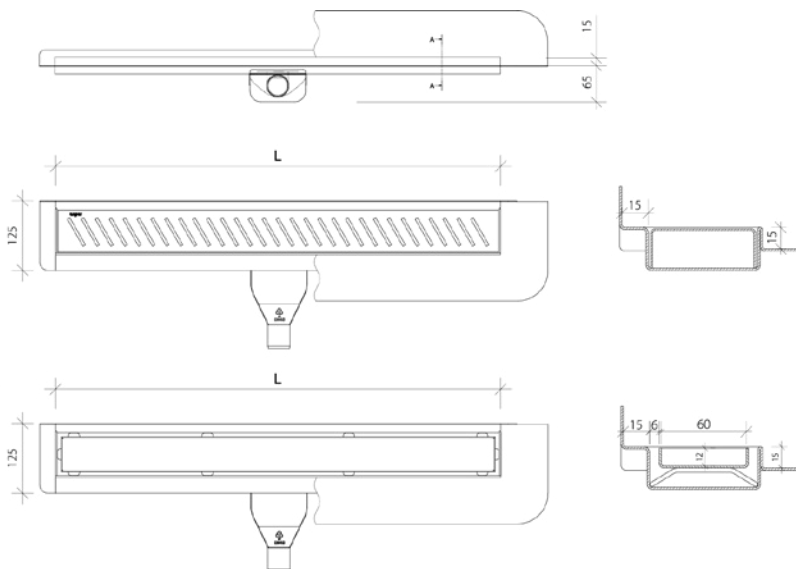

bent flange

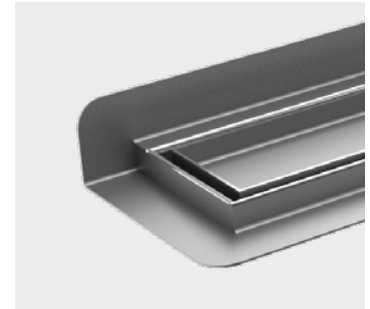

surface finish



STAINLESS STEEL



DURABILITY



GOOD QUALITY



CLEANABLE



100% RESISTANCE



CAPACITY



LOW HEIGHT



120°C



EASY INSTALLATION


PONENTE




PURE




ZONDA




MISTRAL



SIROCCO



TIVANO




PREMIUM SLIM

The PREMIUM SLIM linear shower drains are a series of WIPER linear drains complete with a sealing flange that helps with installation of the product in a floor system which features a water-proofing layer. An optional membrane can be used to greatly facilitate installation. The finished installation provides a smartly refined grate and frame of stainless steel, 58 mm wide and as long as ordered, which means virtually any length desired. The drains set feature the SMART TRAP®, a new, patented stainless-steel drain trap with a throughput of 26 l/min and the EASY CLEAN system. The product is available in many versions to suit the needs of diverse projects.

wiper®



PREMIUM SLIM

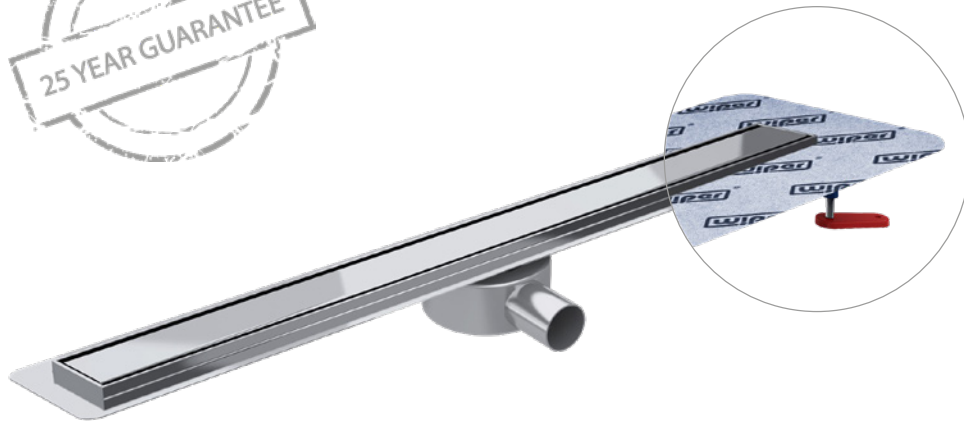

For this product you can buy:

- SEALING MEMBRANE
- ADJUSTABLE LEGS PCL-1
- TANKING KIT s. 44

○ Discharge pipe dia. \varnothing 40 or \varnothing 50 if installed with the included reducer (adapter) piece

• Standard lengths L [mm]:
500, 600, 700, 800, 900, 1000, 1100, 1200



• Water flow rate acc. EN 1253 Q [l/min]:
26 - EN1253

• System EASY CLEAN

steel siphon



flange

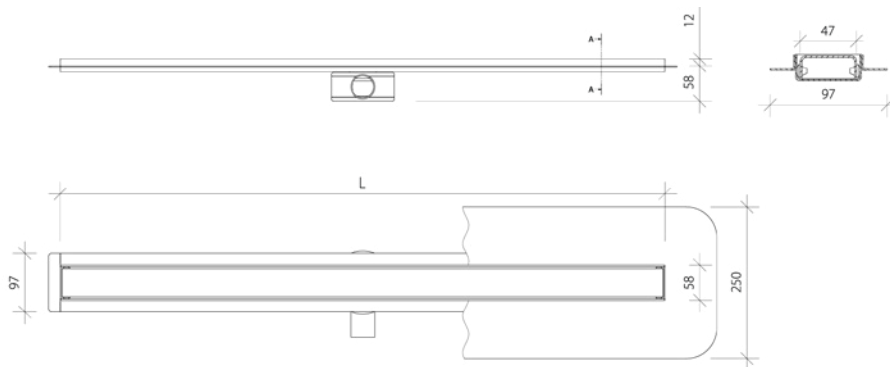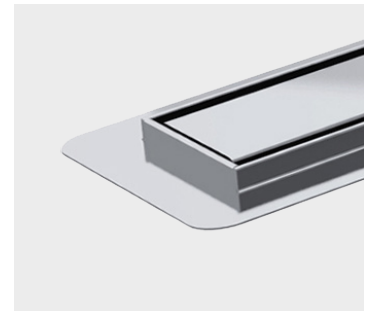

surface finish



STAINLESS STEEL



DURABILITY



GOOD QUALITY



CLEANABLE



100% RESISTANCE



CAPACITY



LOW HEIGHT



120°C




EASY INSTALLATION


PONENTE




PURE



MISTRAL



SIROCCO





INVISIBLE

The INVISIBLE linear shower drains are the concept of a visually minimalist take on standard linear drains. When installed, its parts are perfectly invisible. The only visible feature are the drain slots in the floor to accept the water through. This solution is recommended for floorings made of materials which can be cut and trimmed to obtain an aesthetic finish (like vitrified tiles or granite stone). The product kit includes a degreasing wipe to clean the substrate before adhesive bonding.

wiper®



INVISIBLE

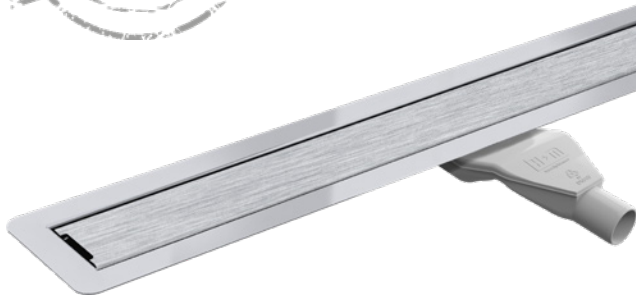

For this product you can buy:

- SEALING MEMBRANE
- ADJUSTABLE LEGS PCL-1
- TANKING KIT s. 44

NEW



Option with siphons also available


DROP 35 and DROP 50

More info on page 50-53


⊙ Discharge pipe dia. \varnothing 40 or \varnothing 50 if installed with the included reducer (adapter) piece

- Standard lengths L [mm]:
500, 600, 700, 800, 900, 1000, 1100, 1200

- Water flow rate acc. EN 1253 Q [l/min]:
36 - siphon SNAKE
48 - siphon DROP 35 and DROP 50

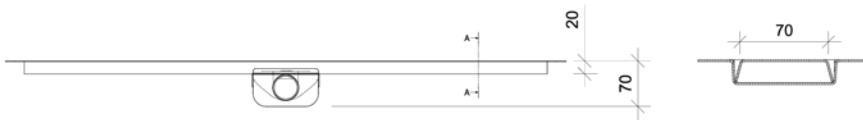

flange

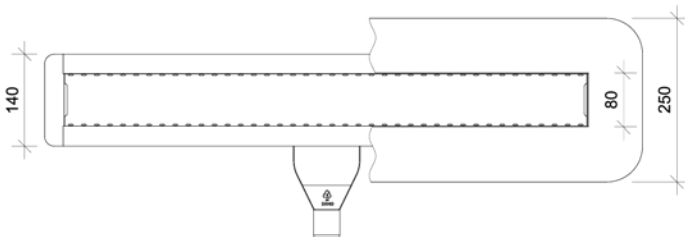

STAINLESS STEEL



DURABILITY



GOOD QUALITY



CLEANABLE



100% RESISTANCE




CAPACITY



LOW HEIGHT




120°C



EASY INSTALLATION

DRAIN PERFECT FOR USE WITH*:

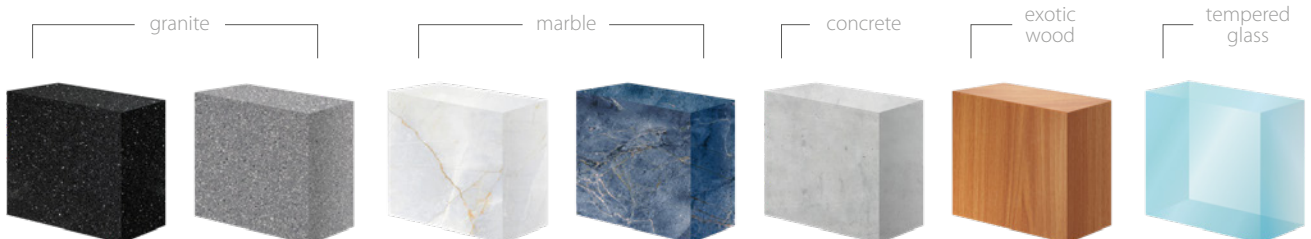

* The manufacturer provides only the drain. The solutions referred to above are only demonstrative propositions.


INVISIBLE SLIM

The INVISIBLE SLIM linear shower drains are the concept of a visually minimalist take on standard linear drains. When installed, its parts are perfectly invisible. The only visible feature are the drain slots in the floor to accept the water through. This solution is recommended for floorings made of materials which can be cut and trimmed to obtain an aesthetic finish (like vitrified tiles or granite stone). The kitted linear drains feature the SMART TRAP®, a new, patented stainless-steel drain trap with a throughput of 26 l/min, the EASY CLEAN system, and a degreasing wipe to clean the substrate before adhesive bonding.

wiper®



INVISIBLE SLIM

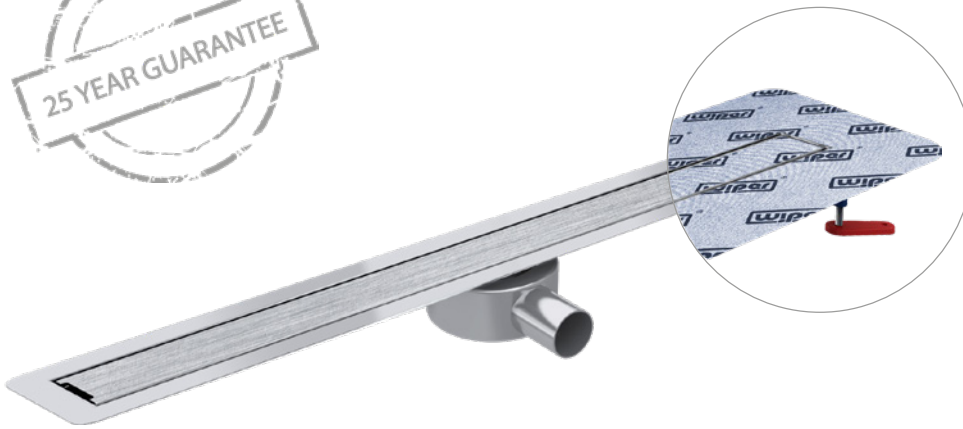

For this product you can buy:

- SEALING MEMBRANE
- ADJUSTABLE LEGS PCL-1
- TANKING KIT s. 44

○ Discharge pipe dia. \varnothing 40 or \varnothing 50 if installed with the included reducer (adapter) piece

- Standard lengths L [mm]:
500, 600, 700, 800, 900, 1000, 1100, 1200


- Water flow rate acc. EN 1253 Q [l/min]:
26 - EN1253

- System EASY CLEAN

steel siphon



flange

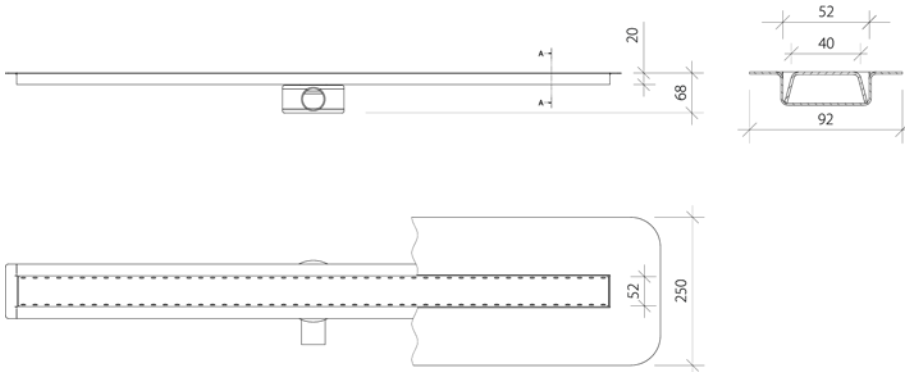

STAINLESS STEEL



DURABILITY



GOOD QUALITY




CLEANABLE



100% RESISTANCE



CAPACITY



LOW HEIGHT




120°C



EASY INSTALLATION

DRAIN PERFECT FOR USE WITH*:

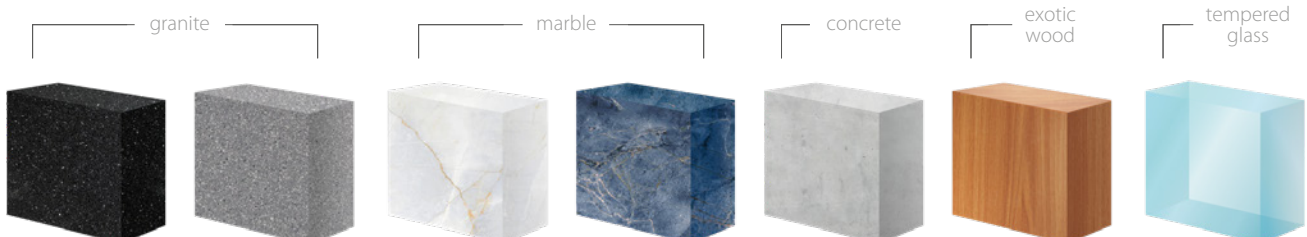

* The manufacturer provides only the drain. The solutions referred to above are only demonstrative propositions.

ELITE

The ELITE linear shower drains are modern drain units with sealing flanges. The ELITE drains feature frames with height adjustment from 8 to 12 mm (or up to 50 mm for thick flooring) and a 58 mm wide grate (with a 72 mm wide frame). An optional, perforated membrane is available to improve the adhesion to the installation substrate and reduce the setting time of the glue. The product is available in many versions to suit the needs of diverse projects.

wiper®



ELITE

NEW




Option with siphons also available

DROP 35 and DROP 50

More info on page 50-53

- adjustable height of space for tiles
- double drainage

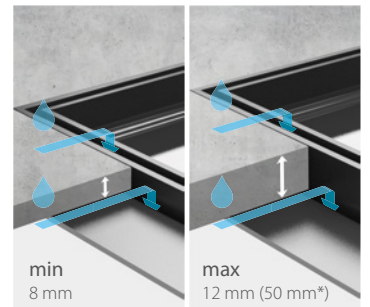


* option

flange



surface finish

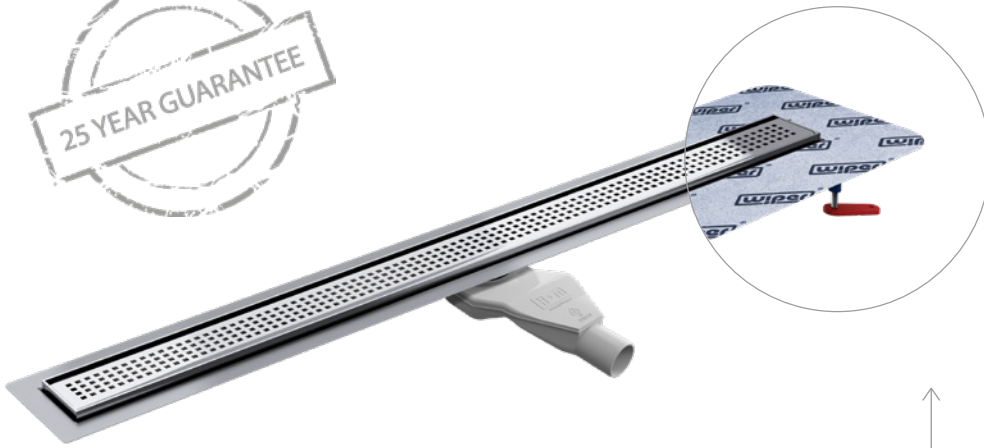

For this product you can buy:

- SEALING MEMBRANE
- ADJUSTABLE LEGS PCL-1
- TANKING KIT s. 44

○ Discharge pipe dia. \varnothing 40 or \varnothing 50 if installed with the included reducer (adapter) piece


• Standard lengths L [mm]:

500, 600, 700, 800, 900, 1000, 1100, 1200

• Water flow rate acc. EN 1253 Q [l/min]:

36 - siphon SNAKE

48 - siphon DROP 35 and DROP 50

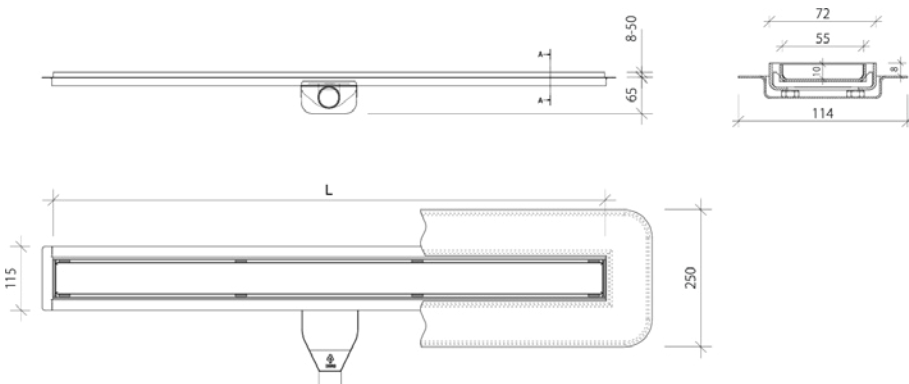

STAINLESS STEEL



DURABILITY



GOOD QUALITY



CLEANABLE



100% RESISTANCE



CAPACITY



LOW HEIGHT



120°C



EASY INSTALLATION


PONENTE




PURE




ZONDA



MISTRAL



SIROCCO



TIVANO



ELITE SLIM


The ELITE SLIM linear shower drains are modern drain units with sealing flanges. The ELITE SLIM drains feature a low installation height of 64 mm up to the flange, frames with height adjustment from 8 to 12 mm (or up to 50 mm for thick flooring), and modern design lines, with the grate 34 mm wide only (with a 48 mm wide frame). The ELITE SLIM linear drains feature the SMART TRAP®, a new, patented stainless-steel drain trap with a flow rate of 26 l/min and the EASY CLEAN system. An optional, perforated sealing sleeve is available to improve the adhesion to the installation substrate and reduce the setting time of the glue.

wiper®



ELITE SLIM

- adjustable height of space for tiles
- double drainage

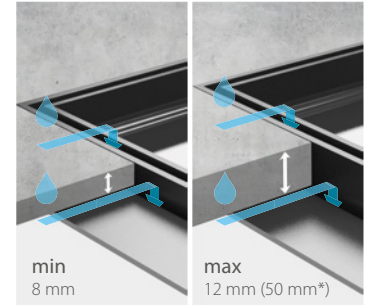


* option

steel siphon



flange

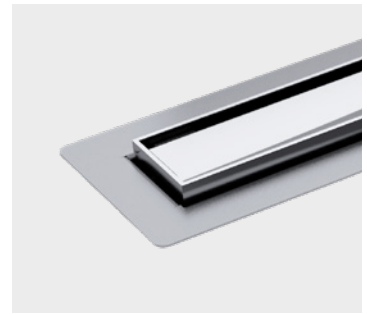

surface finish



For this product you can buy:


- SEALING MEMBRANE
- ADJUSTABLE LEGS PCL-1
- TANKING KIT s. 44

⊙ Discharge pipe dia. \varnothing 40 or \varnothing 50 if installed with the included reducer (adapter) piece

- Standard lengths L [mm]:
500, 600, 700, 800, 900, 1000, 1100, 1200

- Water flow rate acc. EN 1253 Q [l/min]:
26 - EN1253

- System EASY CLEAN

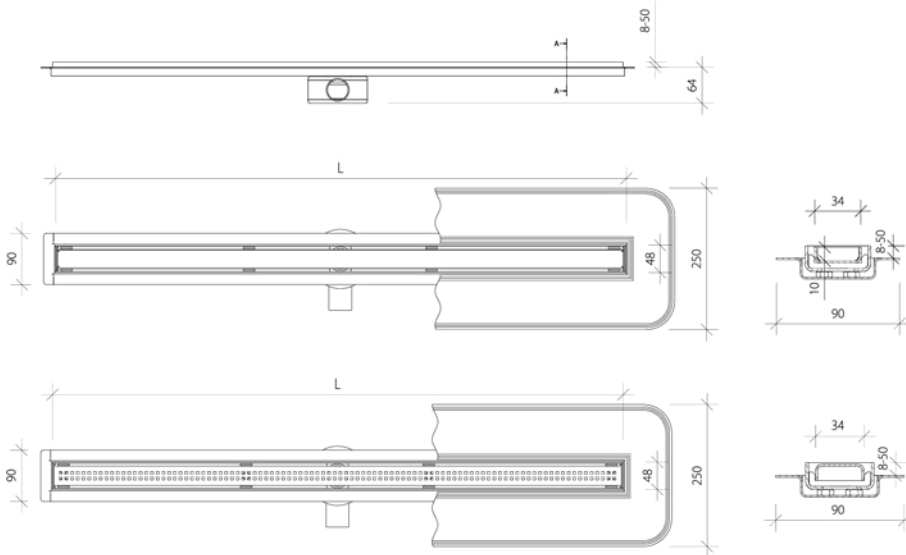

PONENTE



PURE



SIROCCO



CLASSIC

The CLASSIC linear shower drains are a series of WIPER linear drains for installation in floors without a waterproofing layer. The finished installation provides a smartly refined grate and frame of stainless steel, 84 mm wide and as long as ordered, which means virtually any length desired. The product is available in many versions to suit the needs of diverse projects.

wiper®



CLASSIC



⊙ Discharge pipe dia. \varnothing 40 or \varnothing 50 if installed with the included reducer (adapter) piece

• Standard lengths L [mm]:
500, 600, 700, 800, 900, 1000, 1100, 1200

• Water flow rate acc. EN 1253 Q [l/min]:
36 - siphon SNAKE
48 - siphon DROP 35 and DROP 50



For this product you can buy:

- ADJUSTABLE LEGS PCL-1
- TANKING KIT s. 44

NEW




Option with siphons also available







DROP 35 and DROP 50

More info on page 50–53

no flange

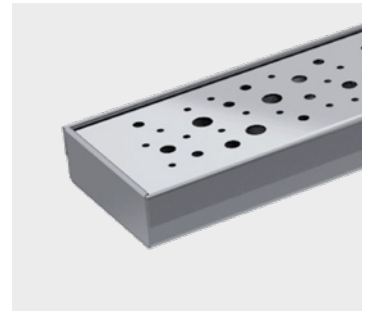

surface finish

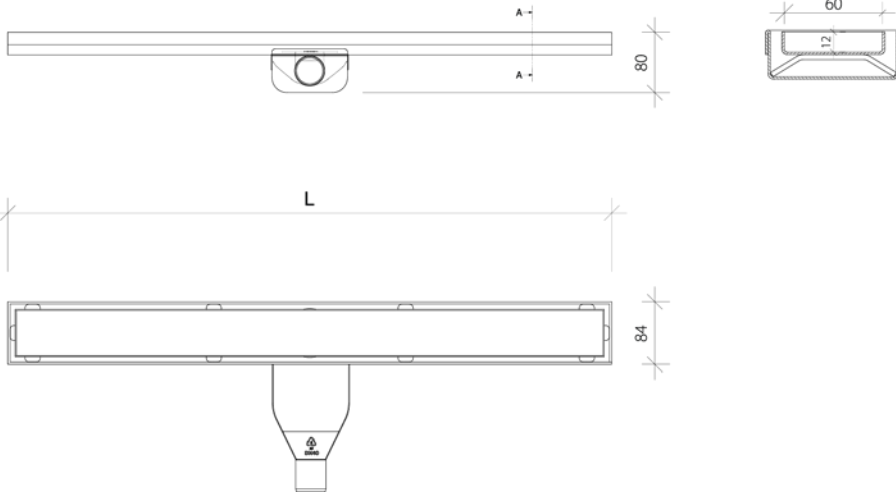

EYE-DRAIN

The EYE-DRAIN linear shower drains feature an all-new shape with sleek, refined lines to achieve a unique visual finish and the maximum functional performance and virtually unlimited service life. The WIPER Eye-drain is an innovative PREMIUM-class linear shower drains. It goes perfectly well with mosaic flooring patterns and natural stone. The kit includes a fitting membrane and height adjustment feet.



wiper®

EYE-DRAIN



Set contains:

- SEALING MEMBRANE
- ADJUSTABLE LEGS PCL-1

For this product you can buy:

- TANKING KIT s. 44

⊙ Discharge pipe dia. \varnothing 40 or \varnothing 50 if installed with the included reducer (adapter) piece

• Standard lengths L [mm]:

500, 600, 700, 800, 900, 1000, 1100, 1200

• Water flow rate acc. EN 1253


Q [l/min]: 29*

* value for A0

flange



surface finish

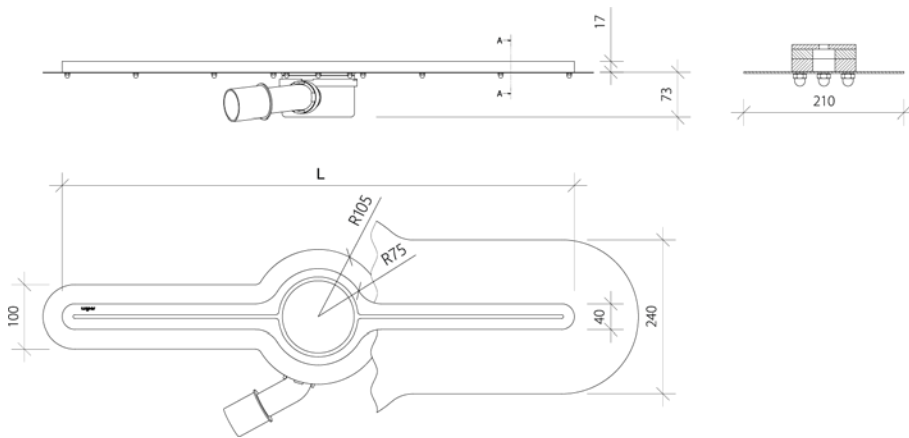

STAINLESS STEEL



DURABILITY



GOOD QUALITY



CLEANABLE



100% RESISTANCE




CAPACITY




LOW HEIGHT




120°C



EASY INSTALLATION



A4



A2L



A2



A1



A0


PREMIUM

ZKL / ZKPL / ZKP

The PREMIUM ZK linear shower drains are a series of WIPER linear drains complete with a membrane that helps with installation of the product in a floor system which features a water-proofing course. The flange is bent vertically (and with many options available) which facilitates installation at the floor-to-wall corners with an optimum offset between the grate and the wall tiles. The finished installation provides a smartly refined grate and frame of stainless steel, 84 mm wide and as long as ordered, which means virtually any length desired. The product is available in many versions to suit the needs of diverse projects.




PREMIUM ZKL / ZKPL / ZKP

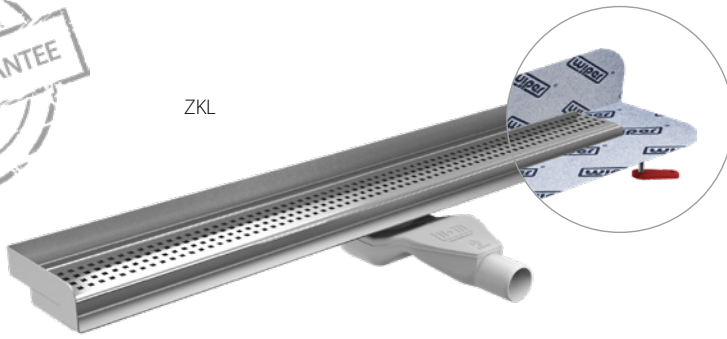

ZKL



ZKPL

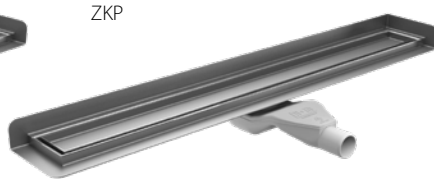

ZKP

- Water flow rate acc. EN 1253 Q [l/min]:
36 - siphon SNAKE
48 - siphon DROP 35 and DROP 50

⊙ Discharge pipe dia. \varnothing 40 or \varnothing 50 if installed with the included reducer (adapter) piece



For this product you can buy:

- SEALING MEMBRANE
- ADJUSTABLE LEGS PCL-1
- TANKING KIT s. 44


NEW




Option with siphons also available

DROP 35 and DROP 50

More info on page 50-53

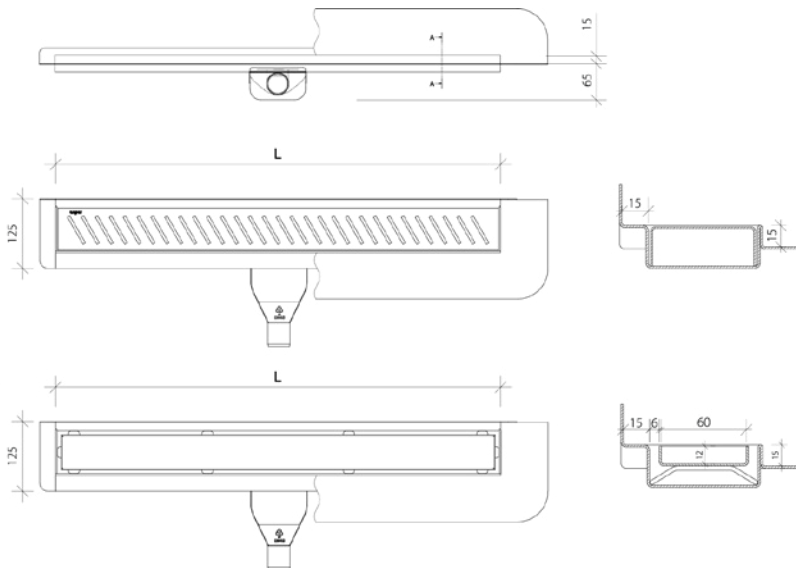

bent flange

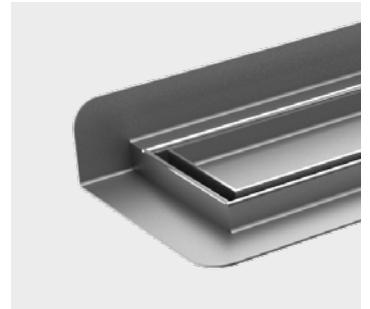

surface finish



STAINLESS STEEL



DURABILITY



GOOD QUALITY



CLEANABLE



100% RESISTANCE




CAPACITY



LOW HEIGHT



120°C




EASY INSTALLATION




PONENTE




PURE



ZONDA



MISTRAL




SIROCCO




TIVANO

S-LINE


The S-LINE linear shower drains are an innovative solution unlocking freedom of shape of the drain embedded in the flooring. This product can be installed along a jacuzzi, a curved pool, or along any shape for a unique architectural design effect.

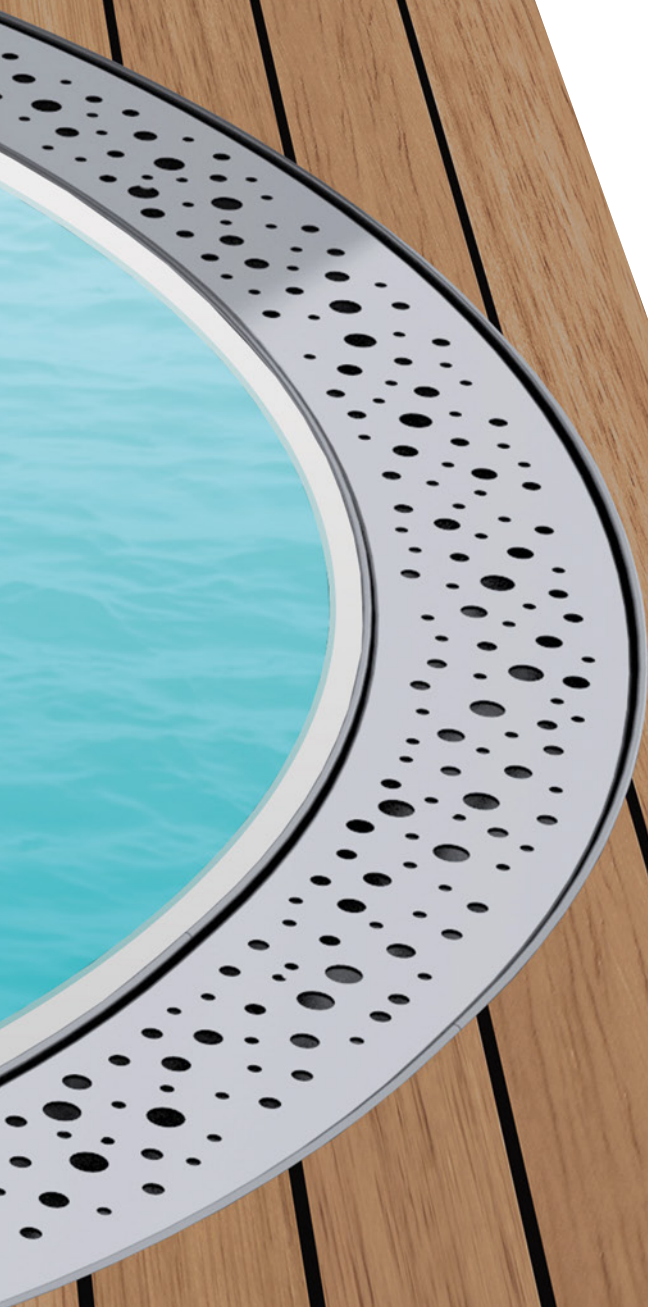

wiper®



S-LINE

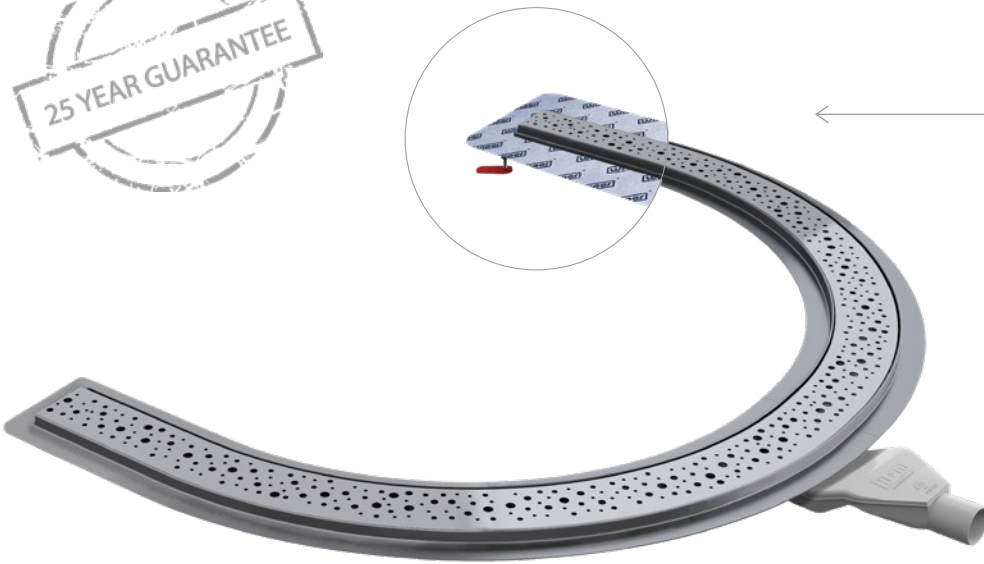

For this product you can buy:

- SEALING MEMBRANE
- ADJUSTABLE LEGS PCL-1
- TANKING KIT s. 44

NEW



Option with siphons also available

DROP 35 and DROP 50


More info on page 50-53

• Water flow rate acc. EN 1253 Q [l/min]:

36 - siphon SNAKE

48 - siphon DROP 35 and DROP 50

○ Discharge pipe dia. \varnothing 40 or \varnothing 50 if installed with the included reducer (adapter) piece

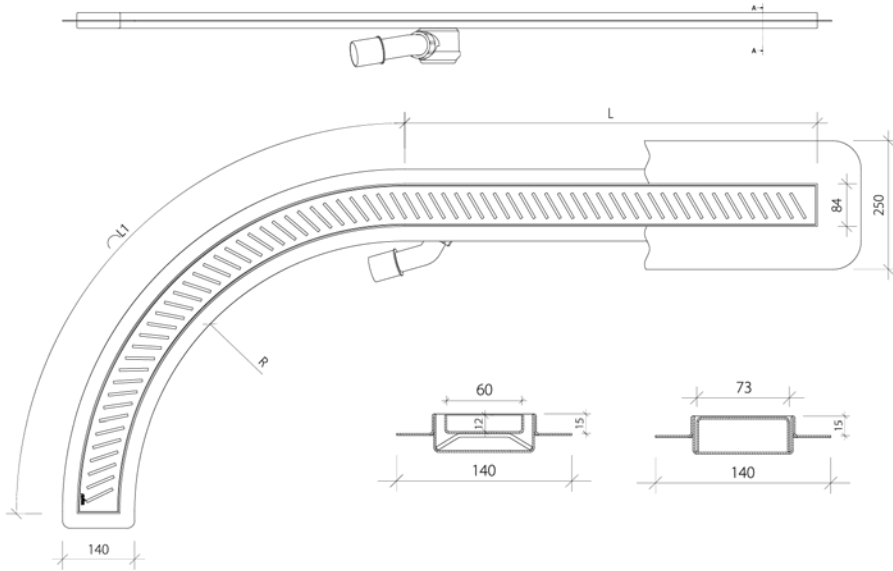

flange



surface finish



STAINLESS STEEL



DURABILITY



GOOD QUALITY



CLEANABLE



100% RESISTANCE




CAPACITY






LOW HEIGHT



120°C



EASY INSTALLATION




LINEAR DRAINS IN ANY LENGTH AND WITH OFFSET DRAIN TRAPS

The custom drains are available in any specified length and with an offset (a.k.a. side) trap. Each custom version requires individual pricing and a longer delivery time.

wiper®



LINEAR DRAINS...



⊙ Discharge pipe dia. \varnothing 40 or \varnothing 50 if installed with the included reducer (adapter) piece

- Water flow rate acc. EN 1253 Q [l/min]:
36 - siphon SNAKE
48 - siphon DROP 35 and DROP 50



For this product you can buy:

- SEALING MEMBRANE
- ADJUSTABLE LEGS PCL-1
- TANKING KIT s. 44

NEW



Option with siphons also available



DROP 35 and DROP 50

More info on page 50-53

flange



surface finish

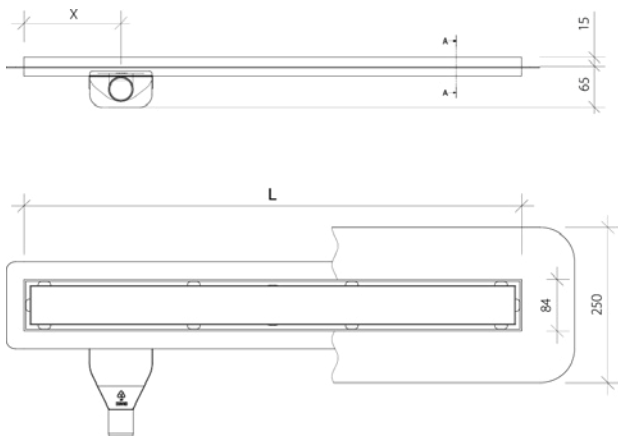

X, L – according to the order



STAINLESS STEEL



DURABILITY



GOOD QUALITY



CLEANABLE



100% RESISTANCE




CAPACITY





LOW HEIGHT



120°C



EASY INSTALLATION



WP PREMIUM

WP PREMIUM is a series of WIPER point drains complete with a sealing flange that helps with installation of the product in a floor system which features a water-proofing course. An optional membrane can be used to greatly facilitate installation. The refined frame and the stainless steel grate crown the finish. The product is available in many versions to suit the needs of diverse projects.



wiper®

WP PREMIUM



For this product you can buy:

- SEALING MEMBRANE
- ADJUSTABLE LEGS PCL-1
- TANKING KIT s. 44

NEW



Option with siphons also available
DROP 50



More info on page 50–53

• Measurements [mm]:

- WP100 – 100 x 100
- WP120 – 120 x 120
- WP150 – 150 x 150

• Water flow rate acc. EN 1253 Q [l/min]:

- 36 - siphon SNAKE
- 48 - siphon DROP 35 and DROP 50

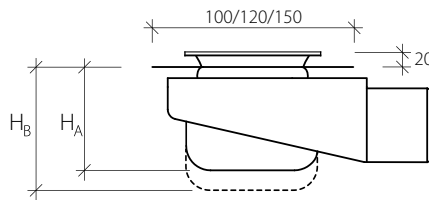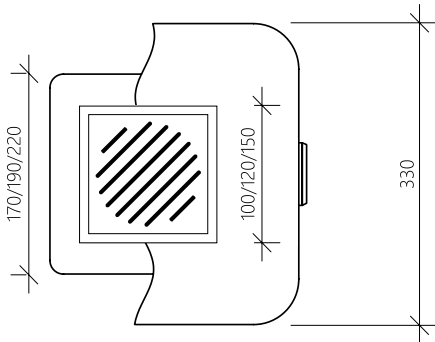

H _A - DROP 35	71 mm
H _B - DROP 50	83 mm

flange



surface finish



STAINLESS STEEL



DURABILITY



GOOD QUALITY




CLEANABLE



100% RESISTANCE



CAPACITY



LOW HEIGHT



120°C




EASY INSTALLATION




PONENTE




PURE




ZONDA



MISTRAL



SIROCCO



TIVANO

Only available with a siphon
McAlpine

WP CLASSIC

WP CLASSIC is a series of WIPER point drains for installation in floors without a waterproofing layer. The refined frame and the stainless steel grate crown the finish. The product is available in many versions to suit the needs of diverse projects.



wiper®

WP CLASSIC



• Measurements [mm]:

- WP100 – 100 x 100
- WP120 – 120 x 120
- WP150 – 150 x 150

• Water flow rate acc. EN 1253 Q [l/min]:

- 48 - siphon DROP 35 i DROP 50
- 26 - siphon McAlpine CD-HC26-65



For this product you can buy:

- TANKING KIT s. 44

NEW



Option with siphons also available



DROP 50

More info on page 50–53

no flange



surface finish

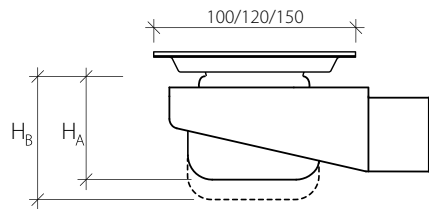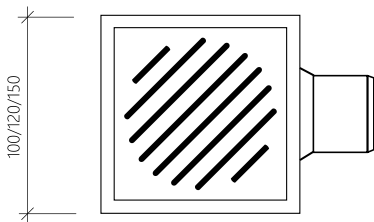

H _A - DROP 35	71 mm
H _B - DROP 50	83 mm



STAINLESS STEEL



DURABILITY



GOOD QUALITY



CLEANABLE



CAPACITY



LOW HEIGHT



120°C




EASY INSTALLATION




PONENTE




PURE




ZONDA



MISTRAL



SIROCCO



TIVANO

Only available with a siphon McAlpine

WP INVISIBLE


NEW

The WP INVISIBLE shower drains are the concept of a visually minimalist take on standard linear drains. When installed, the components are perfectly invisible. The only visible feature are the drain slots in the floor to accept the water through. This solution is recommended for floorings made of materials which can be cut and trimmed to obtain an aesthetic finish (like vitrified tiles or granite stone). The product kit includes a degreasing wipe to clean the substrate before adhesive bonding.



wiper®

WP INVISIBLE

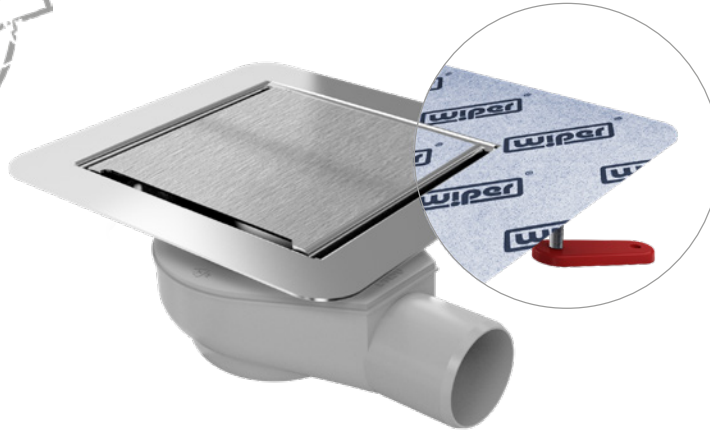

For this product you can buy:

- SEALING MEMBRANE
- ADJUSTABLE LEGS PCL-1
- TANKING KIT s. 44

NEW



Option with siphons also available

DROP 50

More info on page 50–53

• Measurements [mm]:



WP100 – 100 x 100

WP120 – 120 x 120

WP150 – 150 x 150

• Water flow rate acc. EN 1253

Q [l/min]: 48

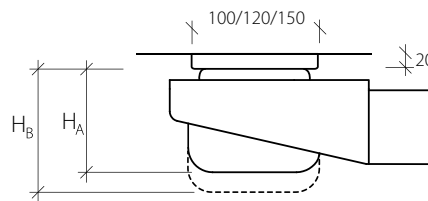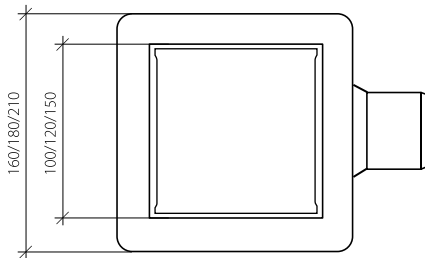

flange



H _A - DROP 35	71 mm
H _B - DROP 50	83 mm



STAL NIERDZEWNA



WYTRZYMAŁOŚĆ



DOBRA JAKOŚĆ



ŁATWE CZYSZCZENIE



HYDROIZOLACJA



DUŻY ODBIÓR
WODY



NISKA ZABUDOWA




120°C



ŁATWY MONTAŻ

DRAIN PERFECT FOR USE WITH*:

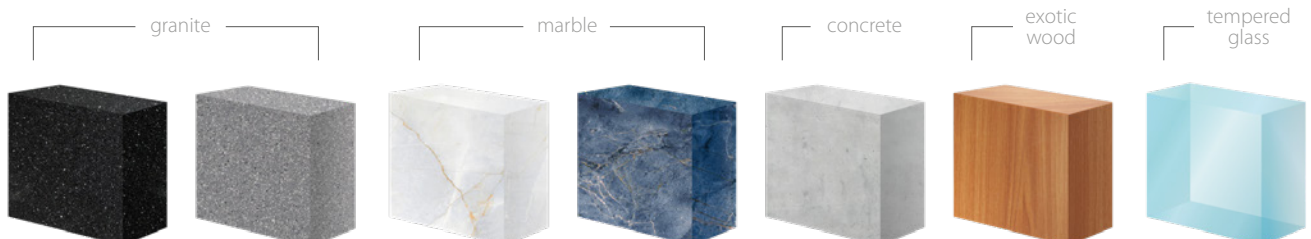

WIPER TOP

WIPER TOP is a floor drain with a square frame and a 122 x 122 mm grate made of stainless steel. The McAlpine brand trap features a check valve and a flow rate of 30 l/min. The discharge port diameter is 40/50 mm. The overall drain height is 143 mm. The kit includes a perforated membrane and a steel flange to be bolted with the provided set of screws.

wiper®



WIPER TOP



○ Discharge pipe dia. \varnothing 40 or \varnothing 50 if installed with the included reducer (adapter) piece



For this product you can buy:

- TANKING KIT s. 44




• Measurements [mm]:

122 x 122






• Water flow rate acc. EN 1253

Q [l/min]: 30

Included:
dedicated sealing membrane and
steel flange

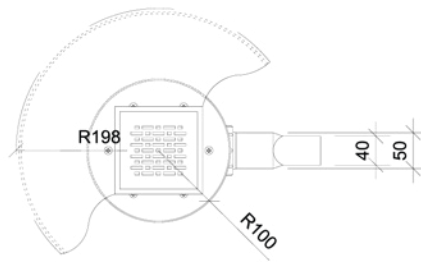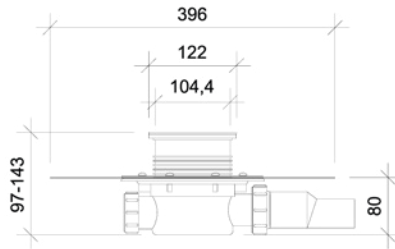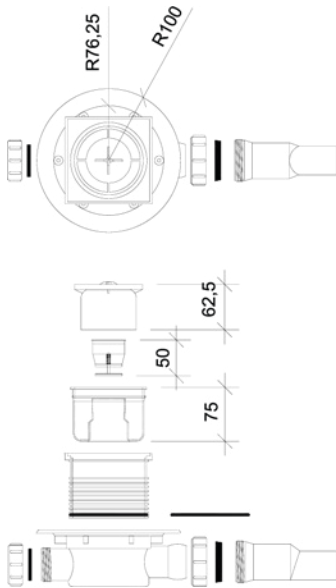

surface finish



SOLID EYE

NEW

A shower tray characterized by an elegant, modern design and a timeless form with an exclusive masking frame with an unprecedented innovative shape. Standard size is 1200 x 900 x thickness 30 mm. The surface has perfect/subtle slopes from and corner of the tray to the drain which provides effortless drainage. The Shower tray can be installed on an existing tiled surface or a screed with tiles layed up to the Shower tray.



realization
~48 h
for standard orders

SOLID EYE

Set consist of:

1. Composite shower tray
2. Eye-cover, stainless steel, polished surface
3. BRIDGE 90 siphon , 100% polypropylene



For this product you can buy:


- TANKING KIT s. 44

**Solid Surface material**

The shower tray is made of very durable Solid material Surface and is the latest generation of mineral-acrylic. It guarantees durability and high resistance to impact and abrasion. The shower tray area is easily renewable, Solid material in case of damage Surface allows for grinding and polishing, because it is uniform in cross-section and is characterized by its absence of pores. This composite material does not allow for the formation of fungi or bacterial growth and is resistant to the action of UV. Although it looks like it natural stone, unlike it, it gives very comfortable feeling of warmth.

Advantages:

- antibacterial properties
- easy to keep clean
- durable
- easy to renovate
- unchanging appearance over many years of use
- Eye cover - made of certified stainless steel
- Cover finish - super polished, the mirror effect, the highest quality available on the market
- the shower tray blends in perfectly with glass, wood and tiles
- new, modern, trendy solution

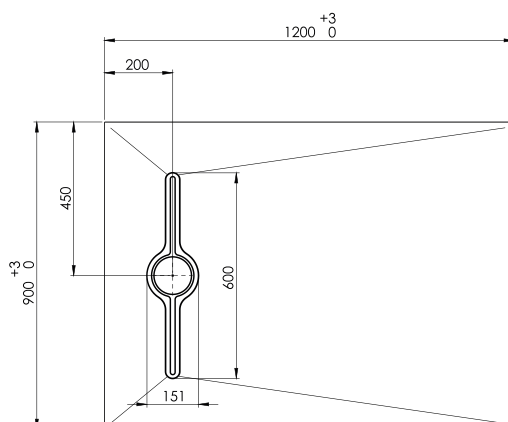UNIFORM
IN SECTIONSURFACE
RENEWABLE

STAINLESS STEEL



LOW HEIGHT



DURABILITY



120°C




GOOD QUALITY



EASY INSTALLATION



CLEANABLE



HEAT INSULATION



100% RESISTANCE



SLOPE SURFACE



CAPACITY


ACOUSTIC
INSULATION

SHOWERLAY

The SHOWERLAY underfloor shower panels comprise an XPS board with a plastic reinforcing mesh, coated with a double coat of a dedicated cement mortar. The product includes a linear shower drain, complete with a cover, and a matching DROP35 drain trap. The essential advantages of the SHOWERLAY include: waterproofing, a slope towards the linear drain, perfect adhesion to top board layer, the top board layer strength sufficient for safe laying of even the finest mosaic tiles, and high acoustic insulation performance.

wiper®



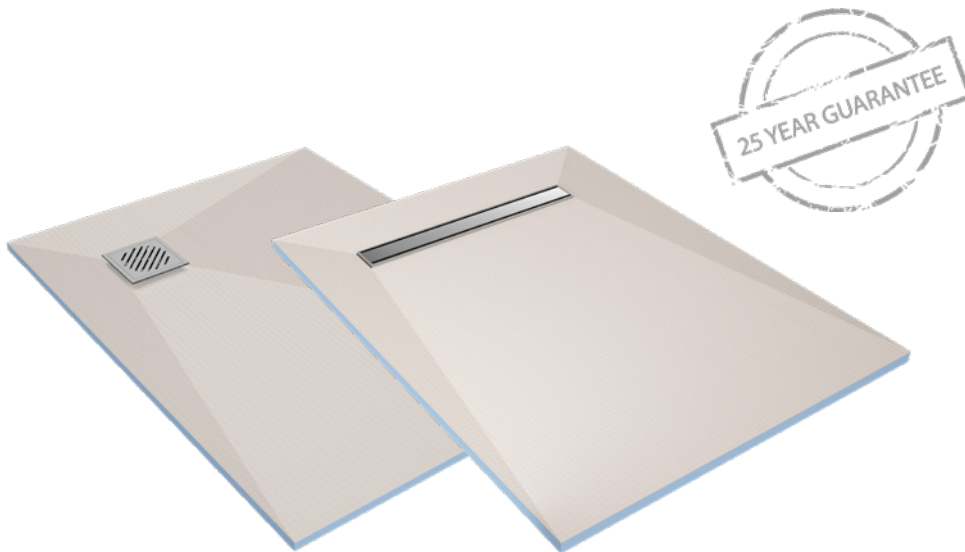

For this product you can buy:


- TANKING KIT s. 44

The properties of the WIPER SHOWERLAY prefabricated panels:

- 100-percent efficient waterproofing
- Downgrade towards the linear/point drain
- Perfect adhesion to top board layer
- The top board layer strength sufficient for safe laying of even the finest mosaic tiles
- High acoustic insulation performance
- Available panel thickness: 20, 30, 40, or 50 mm
- The XPS board needs to be supported under the full surface after the installation
- We can produce other sizes and arrangements of drains on custom order

To specify your order, provide these details:

1. The shower tray thickness (20, 30, 40, or 50 mm)
2. Shower tray type (LINE – with a linear drain or POINT – with a point drain)
3. Overall shower tray size in plan: X and Y
4. Linear/point drain grate design

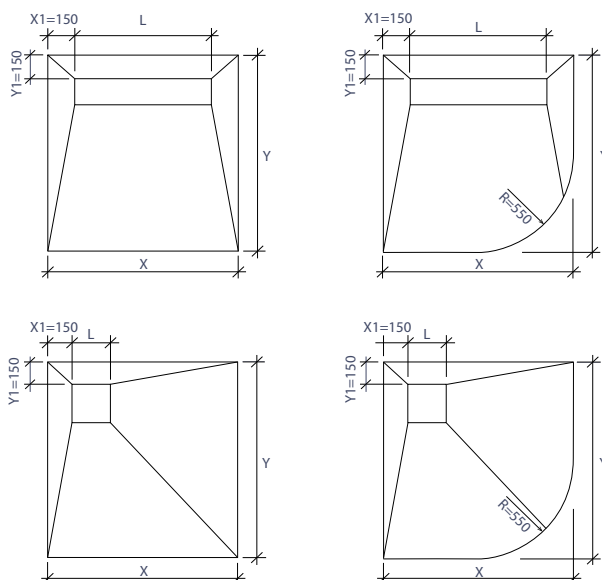

STAINLESS STEEL



LOW/HIGH



DURABILITY



120°C




GOOD QUALITY



EASY INSTALLATION




CLEANABLE



HEAT INSULATION



100% RESISTANCE



SLOPE SURFACE



CAPACITY



ACOUSTIC INSULATION

SHOWERLAY ONEWAY

NEW

OneWay underfloor single-pitched showerlay were created in response to customer demand. They are made of XPS board in a set with a factory-mounted and sealed stainless steel linear drain with a grate in a pattern to choose from and a DROP 35 drain siphon. Simple and modern solution for creating a walk-in shower tray.



realization
~7
working days



For this product you can buy:


- TANKING KIT s. 44

The properties of the WIPER SHOWERLAY prefabricated panels:

- 100-percent efficient waterproofing
- Slope towards the linear drain
- Perfect adhesion to top board layer
- The top board layer strength sufficient for safe laying of even the finest mosaic tiles
- High acoustic insulation performance
- Available panel thickness: 30 or 40 mm
- The XPS board needs to be supported under the full surface after the installation
- We can produce other sizes and arrangements of drains on custom order

To specify your order, provide these details:

1. The shower tray thickness (30 or 40 mm)
2. Overall shower tray size in plan: X and Y
3. Linear drain grate design

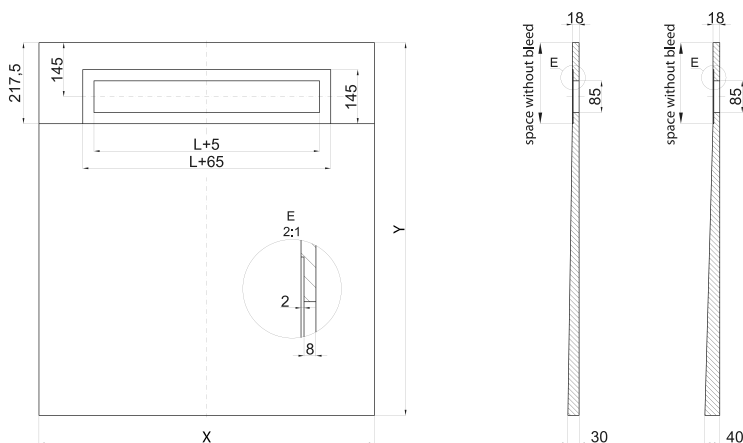

STAINLESS STEEL



LOW/HIGH



DURABILITY



120°C




GOOD QUALITY



EASY INSTALLATION




CLEANABLE



HEAT INSULATION



100% RESISTANCE



SLOPE SURFACE



CAPACITY



ACOUSTIC INSULATION


SYSTEM ISOL-ONE

ISOL-ONE is a complete system of waterproofing and sealing products for wet rooms and surfaces which require waterproofing layer: bathrooms and shower units in private homes, hotels, and public buildings. The ISOL-ONE sealing mat is made of polyethylene film, both sides of which are coated with a specially formulated cloth for better bonding of the adhesive. It is recommended for installation in all rooms which require this sealing and waterproofing method. The mat is impervious to substrate cracking, ensures a secure waterproof seal over its whole surface of coverage, and reduces the installation time by allowing tile laying directly after adhesive bonding of the mat. Flexible quick-setting adhesives are recommended for the installation process, e.g. PCI Rapid Light.



wiper®

SYSTEM ISOL-ONE

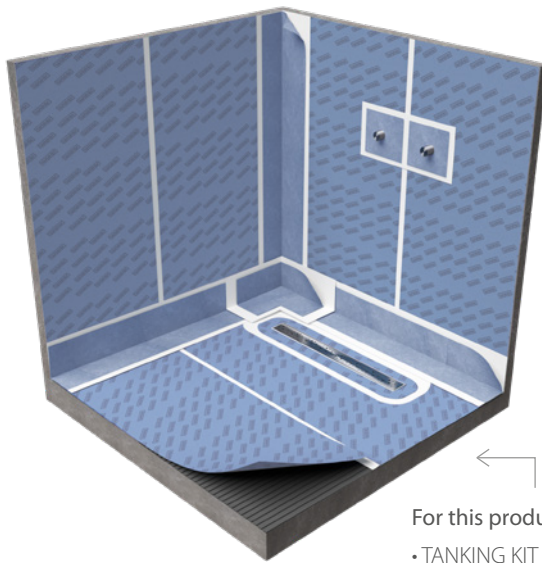

For this product you can buy:

- TANKING KIT s. 44

The ISOL-ONE installation sealing mat is made of polyethylene film, both sides of which are coated with a specially formulated cloth for better bonding of the adhesive. It is recommended for installation in all rooms which require this sealing and waterproofing method. The ISOL-ONE mat is light-weight and resists corrosion and decomposition, ensures a level thickness of the waterproofing layer, resists cracking of the substrate, ensures a secure waterproof seal over its whole surface of coverage, and reduces the installation time by allowing tile laying directly after adhesive bonding of the mat. The components are made of thermoplastic elastomer coated with cloth on both sides. This endows the product with high flexibility and resistance to aggressive media. The mat highly protects corners, edges, superficial cracks, and plumbing penetrations against ingress of moisture by forming elastic and durable joints.

PROPERTIES:

- Watertight
- Plastic
- Bridges cracks
- Ready to use
- Reduced time to proceed with downstream work

ADVANTAGES:


- Binds with every tile laying system
- Seals corner grout in wet rooms by forming flexible and durable joints

APPLICATION:

- Indoor and outdoor
- For walls and floors
- For wet rooms, e.g. bathrooms and shower units in private homes, hotels, and public buildings (moisture load classes A01, A02, A1, and A2)
- Balconies and patios
- For water-sensitive surfaces, e.g. gypsum plaster, gypsum blocks and panels, drywall panels, and chipboards
- For installation on water-absorbing mineral substrates, e.g. concrete, screed, cement render, cellular concrete, cement-based putties, and levelling compounds




ISOL-ONE M100
ISOL-ONE M200
sealing mat

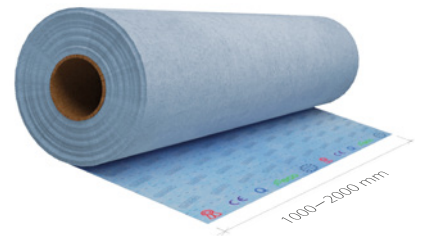


ISOL-ONE T
sealing tape




ISOL-ONE NZ
internal sealing corner

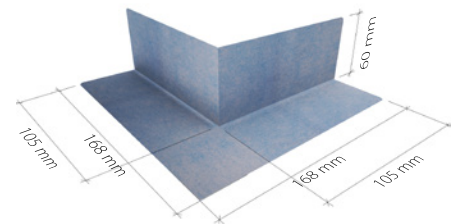

ISOL-ONE NW
external sealing corner

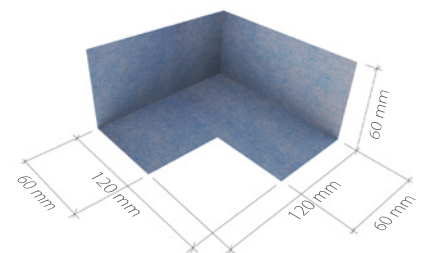

ISOL-ONE O
pipe collar



TANKING KIT FOR SHOWER CABIN

The sealing kit is intended for waterproofing of substrates to be clad in ceramic tiles inside of wet rooms. It is recommended for locations which require a high waterproof performance in presence of high moisture levels (like shower units, bathrooms, toilets, laundry rooms, kitchens, etc.). The waterproofing solution is suitable for all substrate types: drywall panels, plastered walls, gas concrete masonry walls, engineered wood, old cladding of ceramic or stone, and more.

wiper®



TANKING KIT

TANKING KIT INCLUDES:

- tanking liquid 4 kg




- primer 1 l




- sealing tape 10 m



- pipe collar 2 pcs.



- corners 2 pcs.



TANKING LIQUID:

The tanking liquid is a ready-to-use, one-component solvent free sealing compound based on a dispersion of polymers, fillers, and modifiers. When applied to the substrate and set, the product forms a waterproofing coating. The product is intended for permanently occupied interiors, predominantly wet rooms (like bathrooms, kitchens, and laundry rooms), for waterproofing underneath cladding and flooring made with ceramic tiles, glazed tiles, terracotta, timber and wooden panel floorings, and synthetic carpets.

PRIMER:

The product is intended for priming of absorbing, porous substrates indoors and outdoors. It is especially recommended for lime and cement plaster, gas concrete, drywall panels, and cement render. The primer highly penetrates the substrate which deeply absorbs it, becoming stronger and still breathing vapours. These advantages improve the structure of the substrates which have degraded over time. The priming solution improves adhesion of materials to be applied to the sealed substrate. By reducing the absorptivity of the substrate, the yield of applied emulsion paints, adhesives, and mineral putties is improved. The solution contains a biocidal and a fungicidal which preserves the substrate against mould and bacterial growth in the product container.




DURABILITY



GOOD QUALITY



100% RESISTANCE



EASY APPLICATION



RAPID BINDING



HIGH PERFORMANCE

SUNFLOOR

ELEKTRIC UNDERFLOOR HEATING

NEW

The SUNFLOOR heating mat is a modern, easy to install solution to provide the primary or auxiliary heating system at your home. It is thin (4 mm), which makes it easy to install without making the flooring system thicker. The heating mat can be easily embedded in a layer of levelling screed or adhesive mortar, directly under the tiles, without raising the floor surface.



wiper®

SUNFLOOR



Product kitting:

- 50 cm x 2 ÷ 30 m heating mat
- Thermostat with Wi-Fi connectivity (optional)
- Floor temperature sensor
- Shielding zip tube
- Mobile app
- Detailed instructions

The roll width is 50 cm. Thanks to this, the mat can be easily laid out in small rooms, like bathrooms. The mesh to which the cable is attached can be freely trimmed to size and make turns, U-turns, or bypass furniture or other fittings. Do not damage the heating cable while cutting the product to size. The mesh is coated with an adhesive for much easier initial layout fitting. When finally aligned, the mat can be bonded in place with self-adhesive strips.

The controller available for the Sunfloor heating system is a modern digital device with Wi-Fi connectivity for convenient operation with mobile devices. The controller features a modern, minimalist design for a discreet match for any bathroom style. The intuitive touch control panel makes operation user-friendly. The compact front face size of 8.5 x 8.5 cm and a low depth make flush installation easy. The controller provides plenty of convenient features, like open window detection, night mode, anti-freezing mode, and much more. A single unit supports a system of 3600 watts maximum (max. load of 16 amps, which is approximately 23 m²).

Technical specifications:

- Power supply: 230V 50/60Hz
- Input current in standby: < 2W
- Maximum load: 16A
- IP rating: IP21

The Warmme app is very simple to configure, intuitive software that allows you to remotely monitor and set the heating temperature with a mobile phone connected to the same Wi-Fi network as the thermostat control. The app allows you to configure separate temperature settings for different rooms. You can define an advanced heating schedule to reduce energy consumption when no one is at home or when a lower indoor temperature is required at night. You can download the Warmme mobile app to your phone from Google Play or Apple App Store by scanning the QR code from the manual sheet included with the controller.



WIPER SOUND STOP

SOUNDPROOF MAT



NEW

The Wiper Sound Stop sound insulating mat is recommended for acoustic insulation between two adjacent building floors. It effectively absorbs noise and vibration in every shower unit. Sound insulation is recommended for shower units with a low installation height, which results in higher noise due to the acoustic layer originally missing from the separating floor plans.

wiper®

realization
~48 h
for standard orders

WIPER SOUND STOP

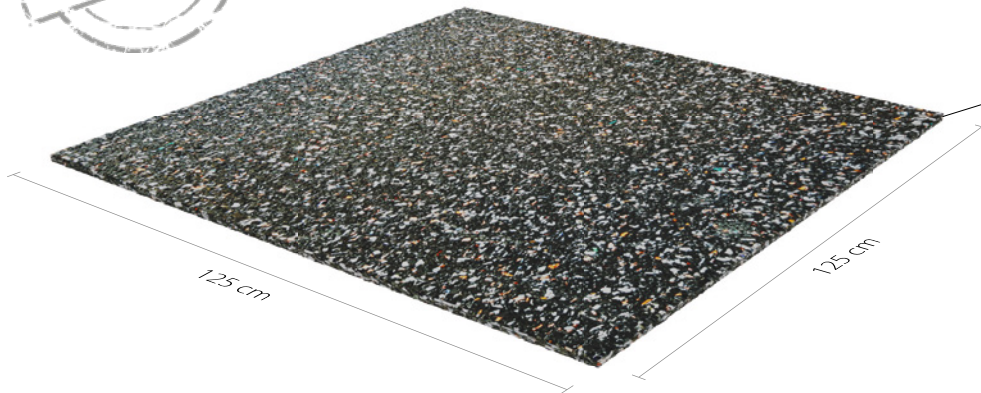

The mat size is 125 x 125 cm with a thickness of mere 0.6 cm. The normal sound reduction over a 35 mm thick screed coat is 19 dB(A). The material is reprocessed rubber with a dedicated PUR elastomer binder. Compared to other acoustic insulation systems, it is extremely resistant to pressure and compression.

Material:
Granulated rubber with PUR elastomer binder

Surface:
Smooth with a grainy texture

Surface unit weight:
3.870 to 4.730 g/m²

Density:
680 to 750 kg/m³

Compressibility:
(DIN EN 12431) < 1.0 mm

Dynamic stiffness:
< 70 MN/m³

Max. pressure:
(EN 826) 0.2 N/mm²

Tensile strength:
(ISO 1798) approx. 0.4 N/mm²

Ultimate elongation:
(ISO 1798) approx. 50%

Temperature range:
-30 °C to 80 °C


Heat transfer coefficient:
(ISO 8302) 0.05 m² K/W

Flammability class:
(ISO 13501) E

Impact sound reduction:
 $\Delta LW = 19$ dB at 6 mm
(over 35mm thick screed)

Emission level:
AgBB program compliant

Diagram of the assembly of the soundproofing mat:

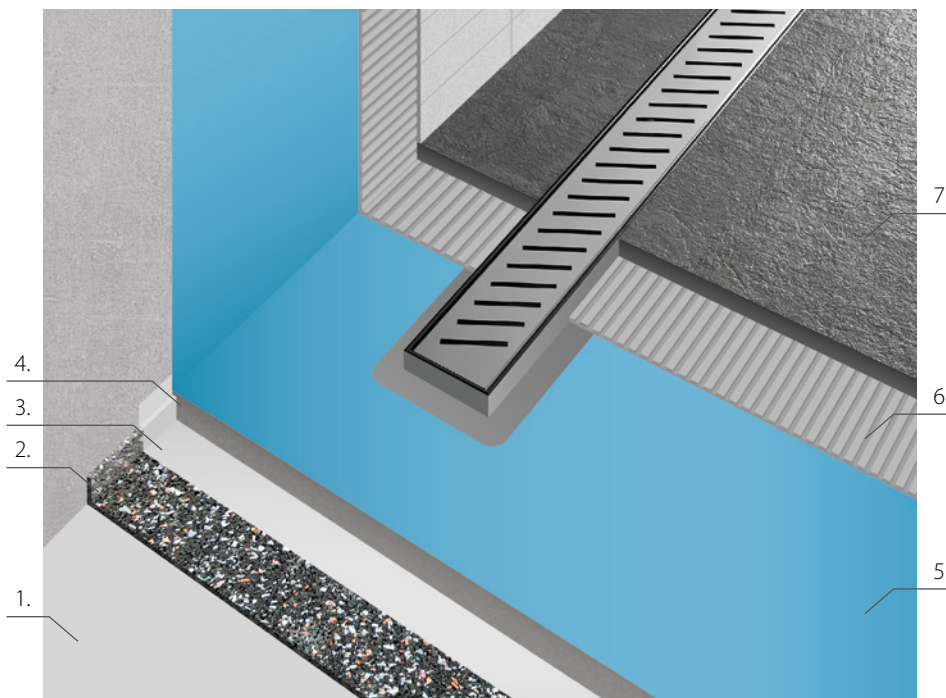

1. leveled substrate
2. soundproof mat
3. isolation foil PE

4. screed
5. waterproofing

6. tile adhesive
7. flooring

SIPHONS

shower trap siphon BRIDGE 90



- **Material**
Hostalen PP
(Polipropylene 100 %)
- **Water seal**
25 mm
- **Height**
45 mm
- **Filter**
Polipropylene
- **Drain diameter**
fi 40 mm
- **Connection**
fi 90 mm
- **Capacity**
32 l/min acc. EN 1253
- **Reducer**
fi 40 mm / 50 mm

NEW

siphon H+M SNAKE



- **Material**
Hostalen PP
(Polipropylene 100 %)
- **Capacity**
36 l/min acc. EN 1253
- **Reducer**
fi 40 mm / 50 mm
- **Filter**
Polipropylene
- **Water seal**
30 mm
- **Height**
45 mm
- **Sealing**
Evopren
- **Drain diameter**
fi 40 mm



- **OPTIONAL dry trap**
A replacement for the inspection tube, it is an inner insert with an odour-stopping membrane to prevent foul smell if the water evaporates.
Capacity 22 l/min

siphon H+M DROP 35



- **Material**
Hostalen PP
(Polipropylene 100 %)
- **Capacity**
48 l/min acc. EN 1253
- **Height**
66 mm
- **Filter**
Polipropylene
- **Water seal**
35 mm
- **Sealing**
Evopren
- **Drain diameter**
fi 50 mm

siphon H+M DROP 50



- **Material**
Hostalen PP
(Polipropylene 100 %)
- **Capacity**
48 l/min acc. EN 1253
- **Height**
78 mm
- **Filter**
Polipropylene
- **Water seal**
50 mm
- **Sealing**
Evopren
- **Drain diameter**
fi 50 mm

siphon H+M PUSH 35



- **Material**
Hostalen PP
(Polipropylene 100 %)
- **Capacity**
48 l/min acc. EN 1253
- **Water seal**
35 mm
- **Drain diameter**
fi 50 mm
- **Height**
62 mm

siphon H+M PUSH 50



- **Material**
Hostalen PP
(Polipropylene 100 %)
- **Capacity**
48 l/min acc. EN 1253
- **Water seal**
50 mm
- **Drain diameter**
fi 50 mm
- **Height**
76 mm

stub / siphon VERTI 50



- **Material**
Polipropylene
- **Filter**
Polipropylene
- **Drain diameter**
fi 50 mm
- **Height**
57 mm

siphon MCALPINE F HC2730LCPN-PB



- **Material**
Polipropylene
- **Filter**
Polipropylene
- **Capacity**
31 l/min acc. EN 1253
- **Water seal**
40 mm
- **Drain diameter**
fi 50 mm
- **Height**
88 mm

siphon MCALPINE HC26-Wiper-65



- **Material**
Polipropylene
- **Filter**
Polipropylene
- **Capacity**
26 l/min acc. EN 1253
- **Water seal**
20 mm
- **Drain diameter**
fi 50 mm
- **Height**
68 mm

siphon MCALPINE N CD-HC26-65



- **Material**
Polipropylene
- **Filter**
Polipropylene
- **Capacity**
26 l/min acc. EN 1253
- **Water seal**
20 mm
- **Drain diameter**
fi 50 mm
- **Height**
68 mm

siphon MCALPINE HC26-Wiper-V50-CD



- **Material**
Polipropylene
- **Filter**
Polipropylene
- **Capacity**
53 l/min acc. EN 1253
- **Water seal**
20 mm
- **Drain diameter**
fi 50 mm
- **Height**
132 mm

HYGIENIC CERTIFICATE

All WIPER brand linear shower drains are Hygiene-Certified by PZH-NIH, the Polish National Institute of Hygiene under its "Certified Product" program.



TABELA MOŻLIWYCH KONFIGURACJI

	PREMIUM	PREMIUM ZK	PREMIUM SLIM	INVISIBLE	INVISIBLE SLIM	ELITE	ELITE SLIM	CLASSIC	EYE-DRAIN	WP PREMIUM	WP INVISIBLE	WP CLASSIC	WIPER TOP
Standard sizes	500÷1200	500÷1200	500÷1200	500÷1200	500÷1200	500÷1200	500÷1200	500÷1200	500÷1200	100 x 100 120 x 120 150 x 150	100 x 100 120 x 120 150 x 150	100 x 100 120 x 120 150 x 150	120 x 120
Custom sizes	○	○	○	○	○	○	○	○	○	×	×	×	×
Sealing membrane	○	○	○	○	○	○	○	×	●	○	○	×	●
Integrated sealing membrane	○	○	○	○	○	○	○	×	○	○	○	×	×
Adjustable legs	○	○	○	○	○	○	○	○	○	○	○	×	×
Siphon SNAKE	●	●	×	●	×	●	×	●	×	×	×	×	×
Siphon DROP 35	●	●	×	●	×	●	×	●	×	●	●	●	×
Siphon DROP 50	●	●	×	●	×	●	×	●	×	●	●	●	×
Horizontal siphon McAlpine HC26	●	●	×	●	×	●	×	●	●	●	●	●	×
Horizontal stainless steel siphon SMART TRAP	○	○	●	○	●	○	●	○	○	○	○	○	×
Vertical stainless steel siphon SLIM	○	○	○	○	○	○	○	○	○	○	○	○	×
Second siphon	○	○	○	○	○	○	○	○	○	×	×	×	×
Surface polish/ brush/ matt	●	●	●	×	×	●	●	●	●	●	×	●	●
Bent flange	○	○	○	○	○	○	○	×	×	×	×	×	×

● standard

○ option available at extra charge

× not available

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	
1																		1
2																		2
3																		3
4																		4
5																		5
6																		6
7																		7
8																		8
9																		9
10																		10
11																		11
12																		12
13																		13
14																		14
15																		15
16																		16
17																		17
18																		18
19																		19
20																		20
21																		21
22																		22
23																		23
24																		24
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	

wiper®

WIPER Sp. z o.o.
ul. Kolejowa 2
43-190 Mikołów
POLAND

+48 (32) 738 5000
poczta@wiper.pl

www.wiper.pl